
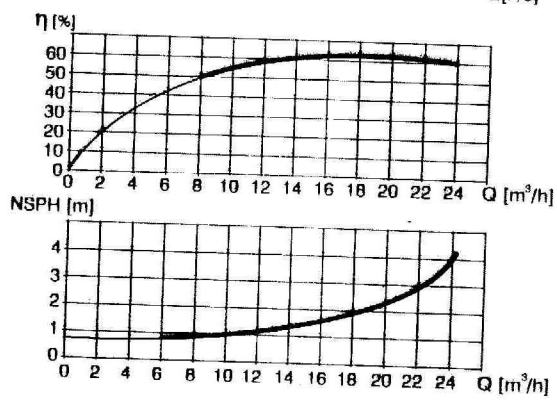
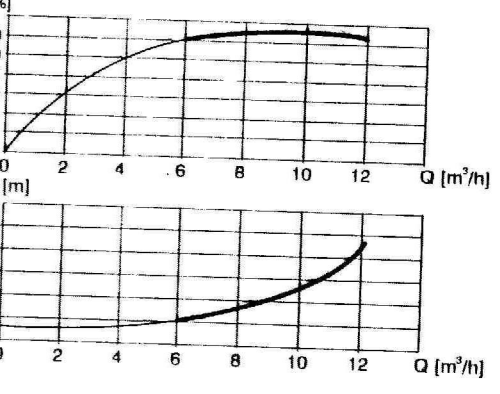
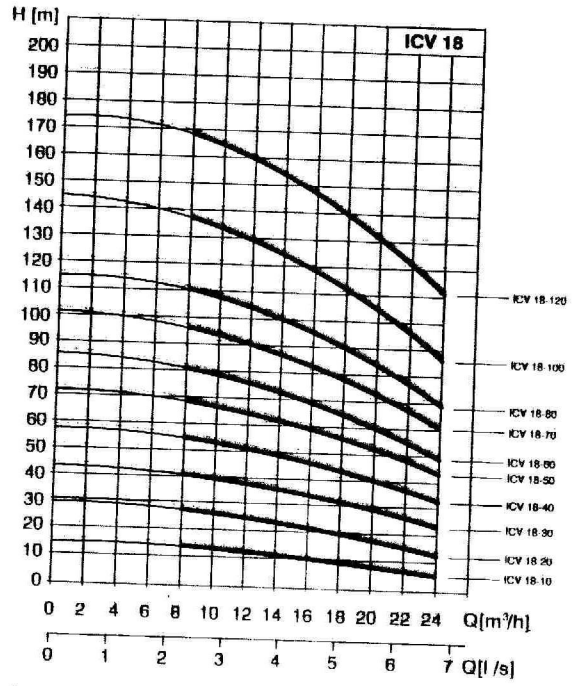


KATALOGOWE CHARAKTERYSTYKI POMP ICL I ICV

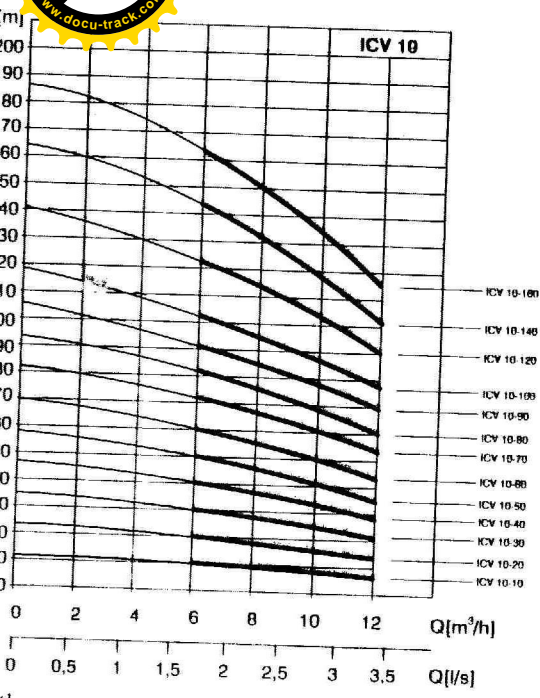

Typ pompy	P [kW]	I _N [A] 3x380 V	I _R /I _N
ICV 10-10	0,75	2,0	6,2
ICV 10-20	0,75	2,0	6,2
ICV 10-30	1,10	2,8	6,5
ICV 10-40	1,50	4,1	5,6
ICV 10-50	2,20	5,7	6,6
ICV 10-60	2,20	5,7	6,6
ICV 10-70	3,00	7,3	7,5
ICV 10-80	3,00	7,3	7,5
ICV 10-90	4,00	9,4	7,4
ICV 10-100	4,00	9,4	7,4
ICV 10-120	5,50	13,2	7,5
ICV 10-140	5,50	13,2	7,5
ICV 10-160	5,50	13,2	7,5

Typ pompy	P [kW]	I _N [A] 3x380 V	I _R /I _N
ICV 18-10	1,10	2,8	6,5
ICV 18-20	2,20	5,7	6,6
ICV 18-30	3,00	7,3	7,5
ICV 18-40	4,00	9,4	7,4
ICV 18-50	5,50	13,2	7,5
ICV 18-60	5,50	13,2	7,5
ICV 18-70	7,50	16,5	7,7
ICV 18-80	7,50	16,5	7,7
ICV 18-100	11,0	26,5	6,1
ICV 18-120	11,0	26,5	6,1